








ENERGY-SAVING TOWER UPS



Energy-saving UPS to save up to 93% of power consumption

Designed for home and office applications, the UT Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The patented GreenPower UPS™ Bypass design achieves ultra-low power consumption to reduce energy costs. The LED indicator shows the utility, battery and operating status of the UPS. Other features include overload protection, EMI filter and configurable alarm to safeguard your devices.


SERIES FEATURES

- Energy Saving Technology
- Automatic Voltage Regulation (AVR)
- LED Status Indicator
- Surge and Spike Protection
- Configurable Alarm
- Generator Compatible
- Overload Protection
- EMI and RFI Filtration
- Phone/Fax/Modem/DSL/Network Protection*
- High-speed Ethernet Data Transmission*

*Selected Model(s)

PRODUCT CALLOUTS

1. Power On/Off Switch
2. LED Status Indicators
3. AC Input Power Cord
4. Circuit Breaker
5. Communication Protection Ports (RJ11/RJ45)
6. Surge Protected Outlets
7. Battery Backup & Surge Protected Outlets

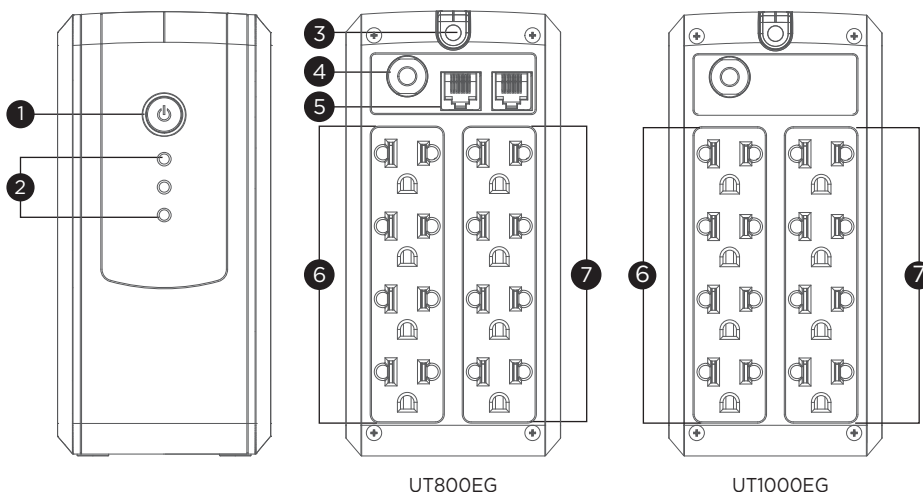

UT800EG

UT1000EG



TECHNICAL SPECIFICATIONS

Model Name	UT800EG		UT1000EG
General			
UPS Topology	Line-interactive		
Energy Saving Technology	GreenPower UPS™ Bypass Technology		
Input			
Generator Compatibility	Yes		
Nominal Input Voltage (Vac)	230 ± 10%		
Input Voltage Range (Vac)	165 - 290		
Input Frequency (Hz)	50 ± 5, 60 ± 5		
Input Frequency Detection	Auto-sensing		
Rated Input Current (A)	2.83		4.55
Input Connector Type	NEMA 5-15P		
Output			
Capacity (VA)	800		1000
Capacity (Watts)	480		500
On Battery Waveform	Simulated Sine Wave		
On Battery Voltage(s) (Vac)	230 ± 10%		
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%		
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck		
Overload Protection	Internal Current Limiting, Circuit Breaker		
Outlet(s) - Total	8		
Outlet Type	AS x 8		
Outlet(s) - Battery & Surge Protected	4		
Outlet(s) - Surge-Only Protected	4		
Typical Transfer Time (ms)	4		
Battery			
Runtime at 60W (min)	30		45
Runtime at 90W (min)	18		31
Runtime at 200W (min)	5		4.5
Typical Recharge Time (Hours)	6		
User-replaceable	No		
Battery Type	Sealed Lead-acid		
Replacement Battery Pack (RBP)	RBP0143		RBP0089
Replacement Battery Pack (RBP) Quantity (pcs)	1		
Surge Protection & Filtering			
Surge Suppression (Joules)	150		
EMI/RFI Filtration	Yes		
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out		-
Management & Communications			
LED Indicators	Power On, Line Mode, Battery Mode, Bypass Mode, Low Battery, Overload, UPS Fault		
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault		
Ethernet Data Transmission Speed	Up to 1Gbps		-
Physical			
Form Factor	Tower		
Physical Size - UPS Module			
Dimensions (WxHxD) (mm.)	84 x 174 x 280		
Weight (kg.)	4		4.7
Environmental			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	0 - 90		
Online Thermal Dissipation (BTU/hr)	34		
Certifications			
RoHS	Yes		

#All specifications are subject to change without notice.